

UTILITY PATENT APPLICATION TRANSMITTAL (Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
11P083162

Total Pages in this Submission

TO THE ASSISTANT COMMISSIONER FOR PATENTSBox Patent Application
Washington, D.C. 20231

Transmitted herewith for filing under 35 U.S.C. 111(a) and 37 C.F.R. 1.53(b) is a new utility patent application for an invention entitled:

SOFTWARE PORTABLE TELEPHONE SET

and invented by:

Masataka Mitama

If a CONTINUATION APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Enclosed are:

Application Elements

1. ☒ Filing fee as calculated and transmitted as described below
2. ☒ Specification having 15 pages and including the following:
 - a. ☒ Descriptive Title of the Invention
 - b. ☐ Cross References to Related Applications (if applicable)
 - c. ☐ Statement Regarding Federally-sponsored Research/Development (if applicable)
 - d. ☐ Reference to Microfiche Appendix (if applicable)
 - e. ☒ Background of the Invention
 - f. ☒ Brief Summary of the Invention
 - g. ☒ Brief Description of the Drawings (if drawings filed)
 - h. ☒ Detailed Description
 - i. ☒ Claim(s) as Classified Below
 - j. ☒ Abstract of the Disclosure

UTILITY PATENT APPLICATION TRANSMITTAL (Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
11P083162

Total Pages in this Submission

Application Elements (Continued)

3. ☒ Drawing(s) (when necessary as prescribed by 35 USC 113)
- a. ☒ Formal Number of Sheets 4 (Figs. 1-4)
- b. ☐ Informal Number of Sheets _____
4. ☒ Oath or Declaration
- a. ☒ Newly executed (original or copy) ☐ Unexecuted
- b. ☐ Copy from a prior application (37 CFR 1.63(d)) (for continuation/divisional application only)
- c. ☒ With Power of Attorney ☐ Without Power of Attorney
- d. ☐ DELETION OF INVENTOR(S)
Signed statement attached deleting inventor(s) named in the prior application,
see 37 C.F.R. 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation By Reference (usable if Box 4b is checked)
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied
under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby
incorporated by reference therein.
6. ☐ Computer Program in Microfiche (Appendix)
7. ☐ Nucleotide and/or Amino Acid Sequence Submission (if applicable, all must be included)
- a. ☐ Paper Copy
- b. ☐ Computer Readable Copy (identical to computer copy)
- c. ☐ Statement Verifying Identical Paper and Computer Readable Copy

Accompanying Application Parts

8. ☒ Assignment Papers (cover sheet & document(s))
9. ☐ 37 CFR 3.73(B) Statement (when there is an assignee)
10. ☐ English Translation Document (if applicable)
11. ☐ Information Disclosure Statement/PTO-1449 ☐ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Acknowledgment postcard
14. ☐ Certificate of Mailing
- ☐ First Class ☐ Express Mail (Specify Label No.): _____

UTILITY PATENT APPLICATION TRANSMITTAL
(Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
11P083162

Total Pages in this Submission

Accompanying Application Parts (Continued)

15. ☒ Certified Copy of Priority Document(s) *(if foreign priority is claimed)*


16. ☐ Additional Enclosures *(please identify below):*

Fee Calculation and Transmittal

CLAIMS AS FILED

For	#Filed	#Allowed	#Extra	Rate	Fee
Total Claims	15	- 20 =	0	x \$18.00	\$0.00
Indep. Claims	2	- 3 =	0	x \$78.00	\$0.00
Multiple Dependent Claims (check if applicable) <input type="checkbox"/>					\$0.00
BASIC FEE					\$690.00
OTHER FEE (specify purpose) <u>Assignment Recordation</u>					\$40.00
TOTAL FILING FEE					\$730.00

- ☒ A check in the amount of \$730.00 to cover the filing fee is enclosed.
- ☒ The Commissioner is hereby authorized to charge and credit Deposit Account No. 50-0481 as described below. A duplicate copy of this sheet is enclosed.
- ☐ Charge the amount of _____ as filing fee.
- ☒ Credit any overpayment.
- ☒ Charge any additional filing fees required under 37 C.F.R. 1.16 and 1.17.
- ☐ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).


Signature

Dated: March 22, 2000

Sean M. McGinn, Esq.
Registration No. 34,386

cc:

Customer No. 21254

MCGINN & GIBB, P.C.
A PROFESSIONAL LIMITED LIABILITY COMPANY
PATENTS, TRADEMARKS, COPYRIGHTS, AND INTELLECTUAL PROPERTY LAW
1701 CLARENDON BOULEVARD, SUITE 100
ARLINGTON, VIRGINIA 22209
TELEPHONE (703) 294-6699
FACSIMILE (703) 294-6696

**APPLICATION
FOR
UNITED STATES
LETTERS PATENT**

APPLICANT: **MASATAKA MITAMA**
FOR: **SOFTWARE PORTABLE TELEPHONE SET**
DOCKET NO.: **11P083162**

SOFTWARE PORTABLE TELEPHONE SET

BACKGROUND OF THE INVENTION

The present invention relates to a software portable telephone set and, more particularly, to a software portable telephone set capable of coping with a plurality of different radio systems with the same hardware structure by emitting reconfiguration afresh and also mounting and demounting for each system.

In a software radio unit, signals which are received and to be transmitted are converted in an A/D and D/A converters from analog to digital signal and vice versa, respectively, so that digital signal processing is performed as much as possible in the radio unit. Digital signal processing is performed according to a software program. This means that the content or function of the signal processing can be changed by replacing the software. It is thus possible to readily cope with a plurality of different radio systems with the same hardware structure by changing programs.

However, when it is intended to apply such software radio techniques to portable telephone sets, the following problem is encountered. To be able to cope with a plurality of different systems, wide-band active and passive components are necessary. Usually, the expanding the frequency band coverage of components results in characteristics deterioration.

Particularly, deterioration of the transmission side characteristics due to frequency band coverage increase

directly influences the performance of the portable telephone set, and this is a great barrier in the realization of software portable telephone sets.

While the above software radio techniques require
5 wide-band passive and active components to be able to cope with a plurality of different systems. Usually, the characteristics of the active and passive components are deteriorated with frequency band coverage increase. Particularly, it is really difficult to maintain high
10 efficiency of a transmitting power amplifier, which is one of the main function components of the transmitting side part, over a wide frequency band. It is also really difficult to increase, with low loss, the frequency band coverage of transmission signal filters and isolators.
15 Deterioration of characteristics of the transmission side components poses problems in the portable telephone set that allowed time of use is reduced and that the size of the portable telephone set body is increased, thus greatly spoiling the commercial value of the software portable telephone set.
20

SUMMARY OF THE INVENTION

The present invention has been for solving the above drawback, and it has an object of providing a software portable telephone set, which have resort to
25 reconfigurable circuit techniques to be able to cope with a plurality of different systems while holding the same hardware structure and permit, with a detachable transmitting function, the selection of best performance

power amplifier and other components for each system,
so that it is suited for frequency band coverage increase.

According to an aspect of the present invention,
there is provided a software portable telephone set
5 comprising a detachable transmitting function and
transmitting and receiving circuits capable of being
reconfigured afresh with software updating, wherein the
transmission system is reconfigured afresh in relation
to the mounting and demounting of a transmitting function
10 part. According to the above invention, it is possible
to provide a transmission part suitable to each system.
Further, a wide range bandwidth transmission and
reception operations are possible by coping with a
plurality of systems with the same hardware
15 construction.

The transmitting function is provided by a
detachable module for transmitting a modulator output
analog signal. According to this, it is possible to
select an optimum module for each system to realize an
20 optimum transmission without degrading the
characteristic of the transmission parts.

The transmitting and receiving circuits have a
software memory part for executing signal conversion
processing, programs transferred from a program memory
25 being set in the software memory part. According to this,
it is possible to easily cope with a plurality of systems
with the same construction.

The transmitting and receiving circuits include a

demodulator, a modulator and wide-band synthesizer which are controlled by a program stored in the software memory part. According to this, it is possible to cope with a plurality of systems with the same construction by
5 controlling the demodulator, modulator and wide-band synthesizer with a program corresponding to each system, with the same construction.

The detachable module includes a power amplifier, a transmission signal filter and an isolator. According
10 to this, it is possible to select an optimum module for each system, thus preventing the degradation of the characteristic of the power amplifier, transmission signal filter and isolator. Further, since the character deterioration is caused the characteristic
15 with low loss can be maintained and the deterioration of the parts is prevented.

The transmitting and receiving circuits have a software memory part for executing signal conversion processing, programs transferred from a program memory
20 being set in the software memory part and a plurality of programs for commanding signal conversion processing are stored in the program memory. According to this, it is possible to can cope with a plurality of systems by storing a plurality of programs and cope with a service
25 in a district corresponding to the movement of portable telephone set.

The transmitting and receiving circuits have a software memory part for executing signal conversion

processing, programs transferred from a program memory
being set in the software memory part and the software
memory provides commands according to a program
transferred from the software source memory according
5 to a system switching command. According to this, it is
possible to cope with each system by the program command.

According to an aspect of the present invention,
there is provided a portable telephone set comprising
a transmission function unit and/or a receipt function
10 unit, wherein the transmission function unit for
performing a specified transmission process is
detachably mounted to a body of the portable telephone
set and the operation of the transmission function and/or
receipt function is determined on the basis of a
15 predetermined software which is selected.

The predetermined software is selected from a
plurality of softwares stored in a memory in the portable
telephone set.

The operation of a received signal mixing portion,
20 a demodulating portion and a base band signal processing
portion in the receipt function unit is determined on
the basis of the predetermined software.

One of a plurality of transmission function units
each performing a different frequency band operation is
25 detachably mounted to the body.

The plurality of softwares are stored in a software
source memory, one of the plurality of softwares is
selected and down-loaded and the operation of the receipt

processing unit is defined by the down-loaded software.

The transmission function unit includes an amplifier, a transmission signal filter and an isolator.

The transmission function unit includes a software
5 memory for storing a plurality of softwares each adapted to each transmission function unit, the predetermined software is defied by loading the software from the software memory in the mounted transmission function unit.

10 Currently operation system is detected on the basis of demodulated output of the received signal in the receipt function unit and the detected system is displayed.

Other objects and features will be clarified from
15 the following description with reference to attached drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a block diagram showing a first embodiment of the present invention;

20 Fig. 2 is a block diagram showing a second embodiment of the present invention;

Fig. 3 is a block diagram showing a third embodiment of the present invention; and

Fig. 4 is a flow chart illustrating the operation
25 of the system detector unit 60.

PREFERRED EMBODIMENTS OF THE INVENTION

Preferred embodiments of the present invention will now be described with reference to the drawings.

An embodiment of the present invention will now be described with reference to the drawings. The embodiment to be described is merely an example of the software portable telephone set according to the present invention.

As shown in Fig. 1, in the software portable telephone set according to the present invention a received signal inputted from an antenna 1 is fed through a received signal mixer 2 and an A/D converter 3 to a demodulator 4. The demodulator 4 is operated according to software down-loaded in a software memory 5. The function of the demodulator 4 can be reconfigured afresh with every software updating.

The down-loaded software is preliminarily stored in a software source memory 6 which is programmed for each system. In other words, a plurality of software entities are stored in the software source memory 6, and one of them is selected and down-loaded in the memory 5 by a software switching controller 5a. The received signal mixer 2 receives a local oscillation signal fed from a wide-band synthesizer 7 with the frequency thereof restricted according to the software. As a result of the demodulation, a digital signal is fed to a baseband signal processor 8 for signal processing, and then fed out through a man-machine interface 9 to the outside. The base-band signal processor 9 can be reconfigured afresh according to the software. On the transmission side, voice or like signal is inputted along a route converse

to that of the received signal to a modulator 10. The modulator 10, like the reception side, can be reconfigured afresh for each system according to software.

5 The modulator output is fed to a D/A converter 11 for conversion to an analog signal. The analog signal is fed to a transmission signal mixer 12 for conversion to a carrier frequency, and then fed to a module 20, which includes a power amplifier 21, a transmission signal
10 filter 22 and an isolator 23, to be sent out via the antenna 1. A plurality of modules (20, 30 and 40) are prepared each for each system such as frequency band and used detachably. Since the modules are detachable, it is possible to select best module components such as power
15 amplifier as for each system. It is thus possible to avoid characteristic deterioration due to frequency band increase.

Fig. 2 is a block diagram showing a second embodiment of the present invention. This embodiment is
20 the same as the previous first embodiment except for that the modules 20, 30 and 40 include respective program memories 24, 34 and 44, in which software for corresponding systems is stored. When a module is mounted, the software thereof is down-loaded in the
25 software memory 5. In this embodiment, the software source memory 6 in the previous first embodiment can be dispensed with, which is desired for reducing the price and size of portable telephone sets.

Fig. 3 is a block diagram showing a third embodiment of the present invention. This embodiment is the same as the previous first embodiment except for that a system detector unit 60 and a system display unit 70 are provided on the transmission side. Fig. 4 is a flow chart illustrating the operation of the system detector unit 60. In Fig. 4, the power of portable telephone set is "on", then a software n ($n=1$ to n) from a software memory 6 is down-loaded (step S1). Next, the system detector 60 checks whether the output of demodulator exists or not (step S2). When no demodulator output is checked the routine is ended. When the demodulator output exists, a display signal for displaying the system n is generated (step S3) and the routine is ended.

From a display obtained as a result of detection, the user can know systems which can be presently used. Thus, a module complying with the display may be selected and mounted. Thus, even in an unfamiliar land or the like, a system offering services can be known, and communication can be readily set.

As has been described in the foregoing, with the software portable telephone set according to the present invention, it is possible to avoid characteristic deterioration of transmission side components with a detachable transmitting function, and also the transmitting and receiving circuits which are capable of being reconfigured afresh permits coping with a plurality of systems with the same hardware structure.

It is thus possible to provide a software portable telephone set, which is suited for frequency band coverage increase.

Changes in construction will occur to those skilled
5 in the art and various apparently different modifications
and embodiments may be made without departing from the
scope of the present invention. The matter set forth in
the foregoing description and accompanying drawings is
offered by way of illustration only. It is therefore
10 intended that the foregoing description be regarded as
illustrative rather than limiting.

What is claimed is:

1. A software portable telephone set comprising a detachable transmitting function and transmitting and receiving circuits capable of being reconfigured afresh with software updating, wherein the transmission system is reconfigured afresh in relation to the mounting and demounting of a transmitting function part.

2. The software portable telephone set according to claim 1, wherein the transmitting function is provided by a detachable module for transmitting a modulator output analog signal.

3. The software portable telephone set according to claim 1, wherein the transmitting and receiving circuits have a software memory part for executing signal conversion processing, programs transferred from a program memory being set in the software memory part.

4. The software portable telephone set according to claim 1, wherein the transmitting and receiving circuits include a demodulator, a modulator and wide-band synthesizer which are controlled by a program stored in the software memory part.

5. The software portable telephone set according to claim 1, wherein the detachable module includes a power amplifier, a transmission signal filter and an isolator.

6. The software portable telephone set according to claim 1, wherein the transmitting and receiving circuits have a software memory part for executing signal conversion processing, programs transferred from a program memory being set in the software memory part and a plurality of programs for commanding signal conversion processing are stored in the program memory.

7. The software portable telephone set according to claim 1, wherein the transmitting and receiving circuits have a software memory part for executing signal conversion processing, programs transferred from a program memory being set in the software memory part and the software memory provides commands according to a program transferred from the software source memory according to a system switching command.

8. A portable telephone set comprising a transmission function unit and/or a receipt function unit, wherein the transmission function unit for performing a specified transmission process is detachably mounted to a body of the portable telephone set and the operation of the transmission function and/or receipt function is determined on the basis of a predetermined software which is selected.

9. The portable telephone set according to claim

8, wherein the predetermined software is selected from a plurality of softwares stored in a memory in the portable telephone set.

10. The portable telephone set according to claim 8, wherein the operation of a received signal mixing portion, a demodulating portion and a base band signal processing portion in the receipt function unit is determined on the basis of the predetermined software.

11. The portable telephone set according to claim 8, wherein one of a plurality of transmission function units each performing a different frequency band operation is detachably mounted to the body.

12. The portable telephone set according to claim 9, wherein the plurality of softwares are stored in a software source memory, one of the plurality of softwares is selected and down-loaded and the operation of the receipt processing unit is defined by the down-loaded software.

13. The portable telephone set according to claim 8, wherein the transmission function unit includes an amplifier, a transmission signal filter and an isolator.

14. The portable telephone set according to claim 8, wherein the transmission function unit includes a

software memory for storing a plurality of softwares each adapted to each transmission function unit, the predetermined software is defied by loading the software from the software memory in the mounted transmission function unit.


15. The portable telephone set according to claim 8, wherein currently operation system is detected on the basis of demodulated output of the received signal in the receipt function unit and the detected system is displayed.

ABSTRACT OF THE DISCLOSURE

Received signal inputted from an antenna 1 is fed
via a received signal mixer 2 and an A/D converter 3 to
a demodulator 4. The demodulator 4 is operated according
5 to software down-loaded in a software memory 5 from a
program memory 6. A demodulator output digital signal
is fed to a base-band signal processor 8 for signal
processing, and then fed out through a man-machine
interface 9 to the outside. On the transmission side,
10 a signal to be transmitted is inputted to a modulator
10 though a route converse to that of the received signal.
The modulator output is fed to a D/A converter 11 for
conversion to an analog signal, which is in turn fed to
a transmission signal mixer 12 for conversion to a carrier
15 frequency, and then fed to a module, which includes a
power amplifier 21, a transmission signal filter 22 and
an isolator 23, to be transmitted via the antenna 1.

083162/1297

FIG.1

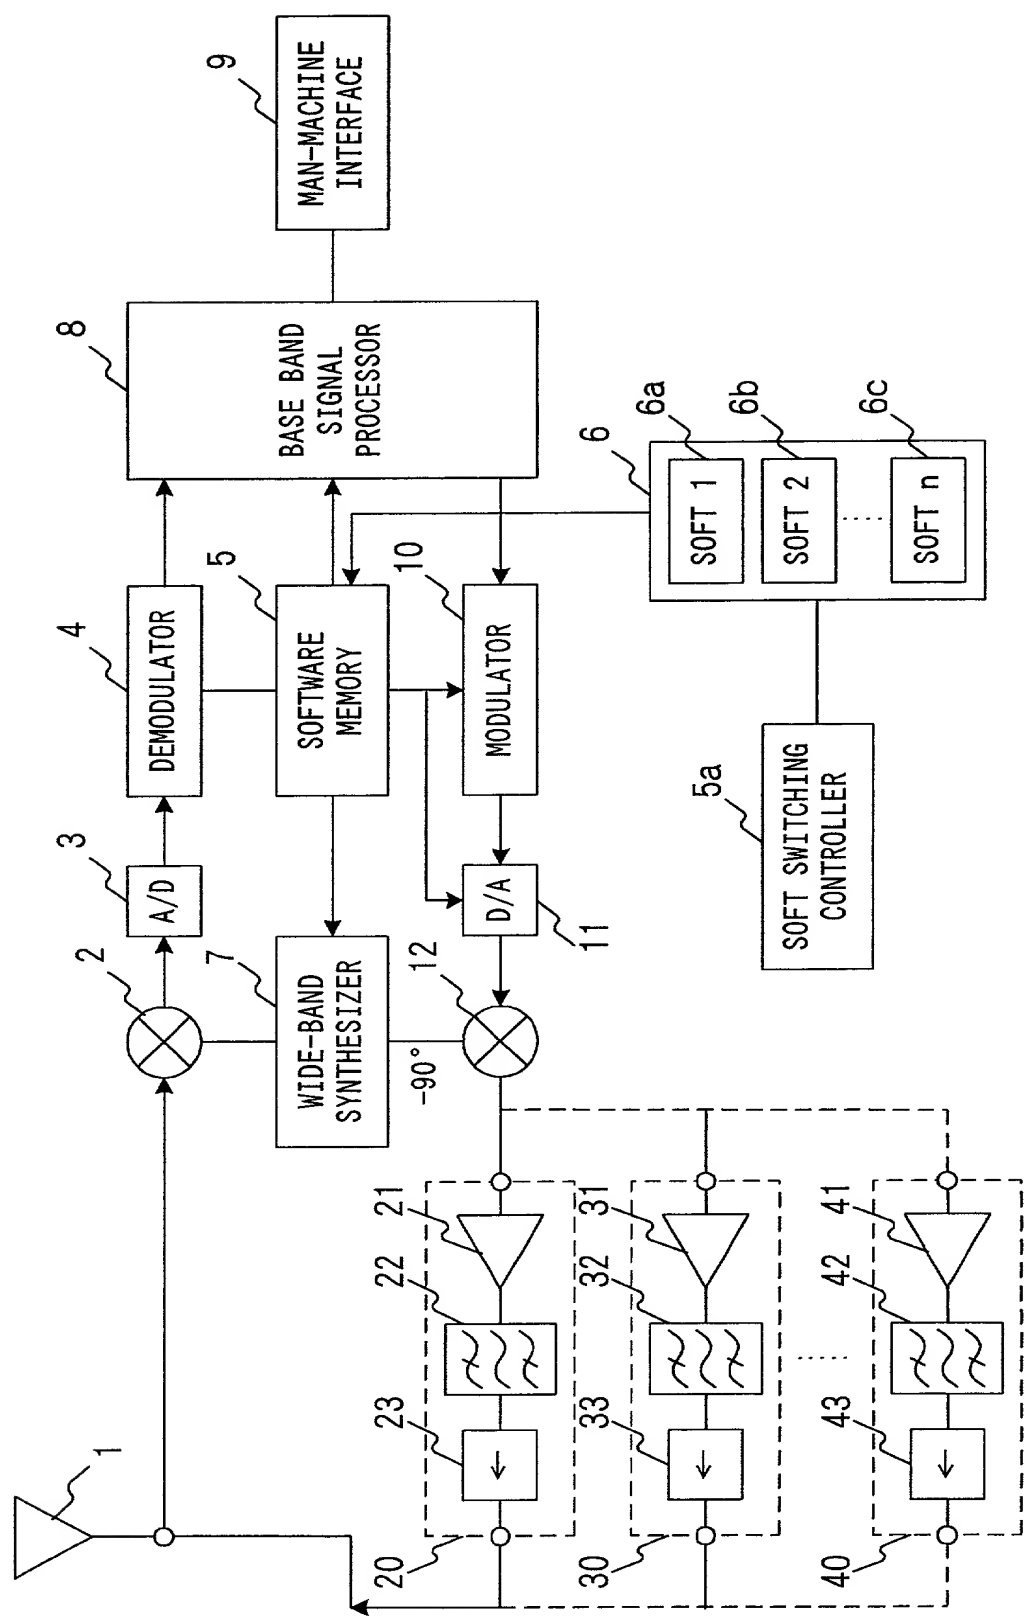

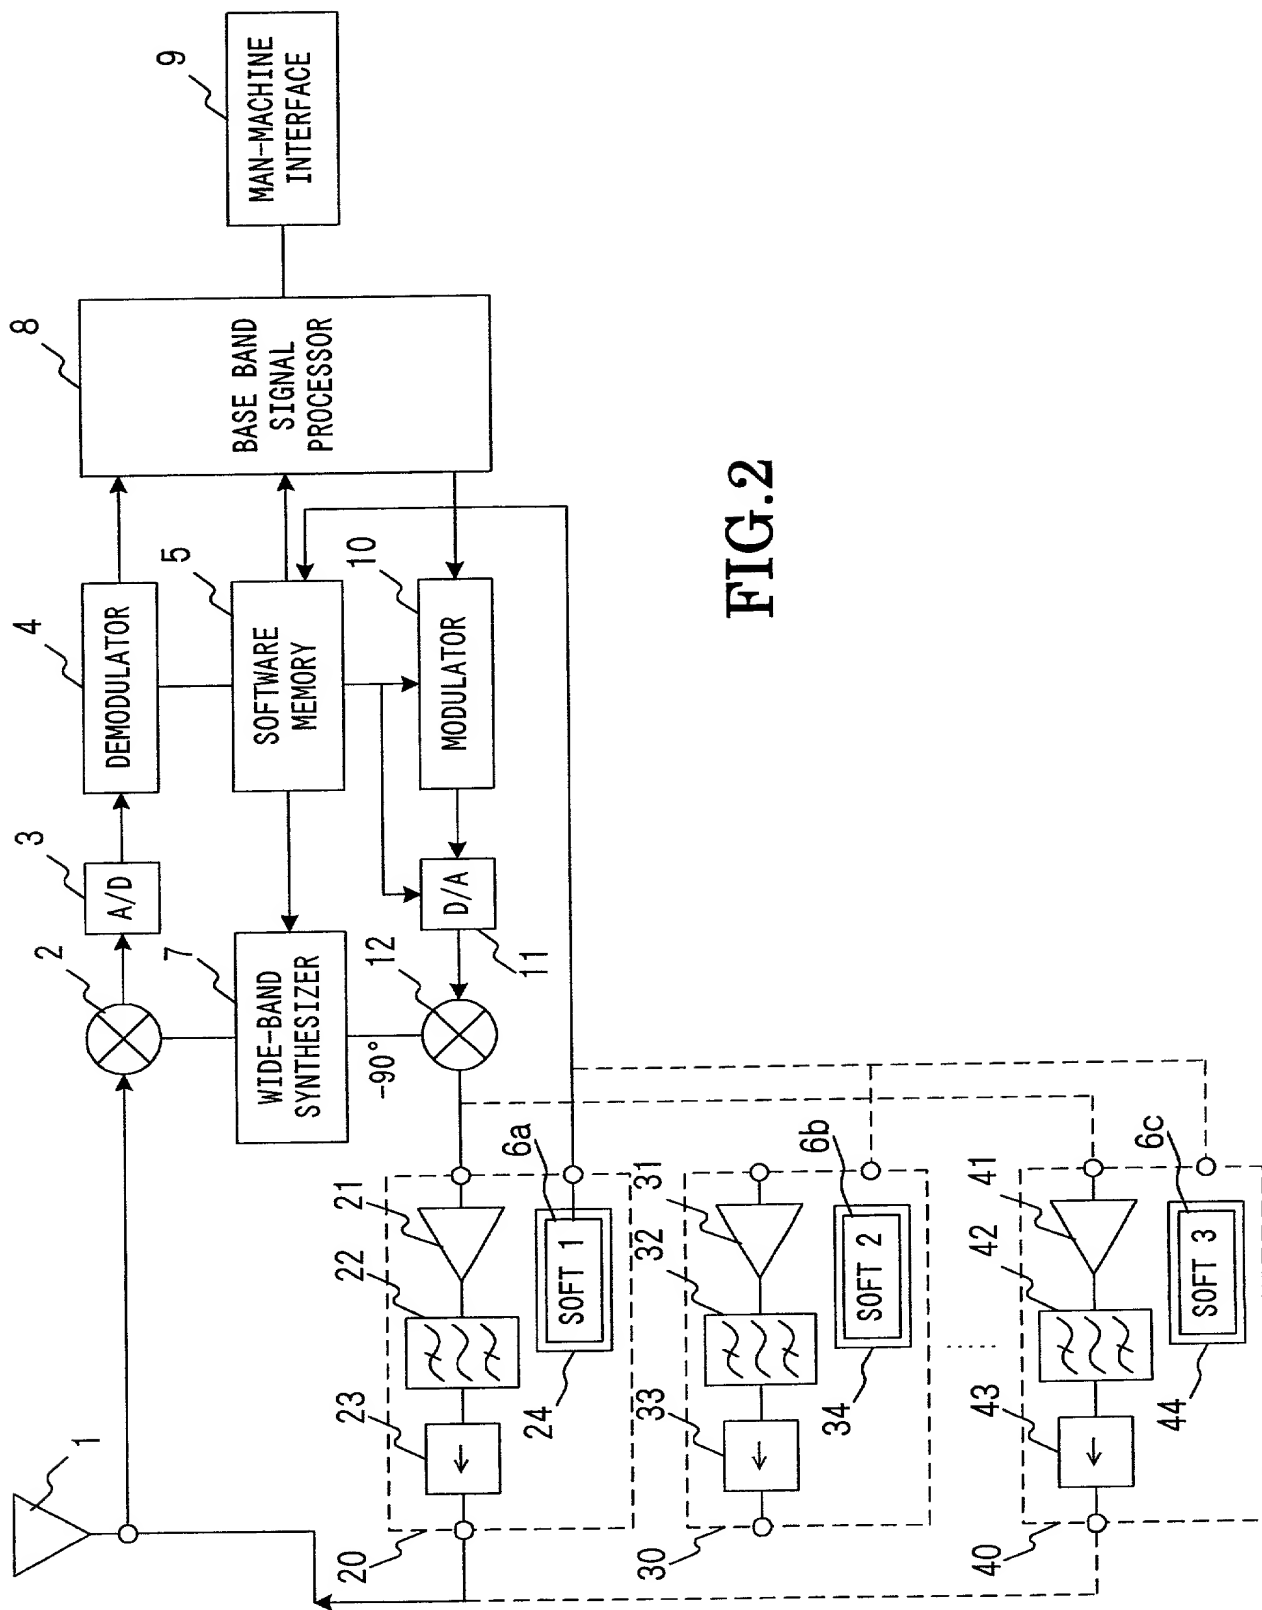


FIG. 2

FIG.3


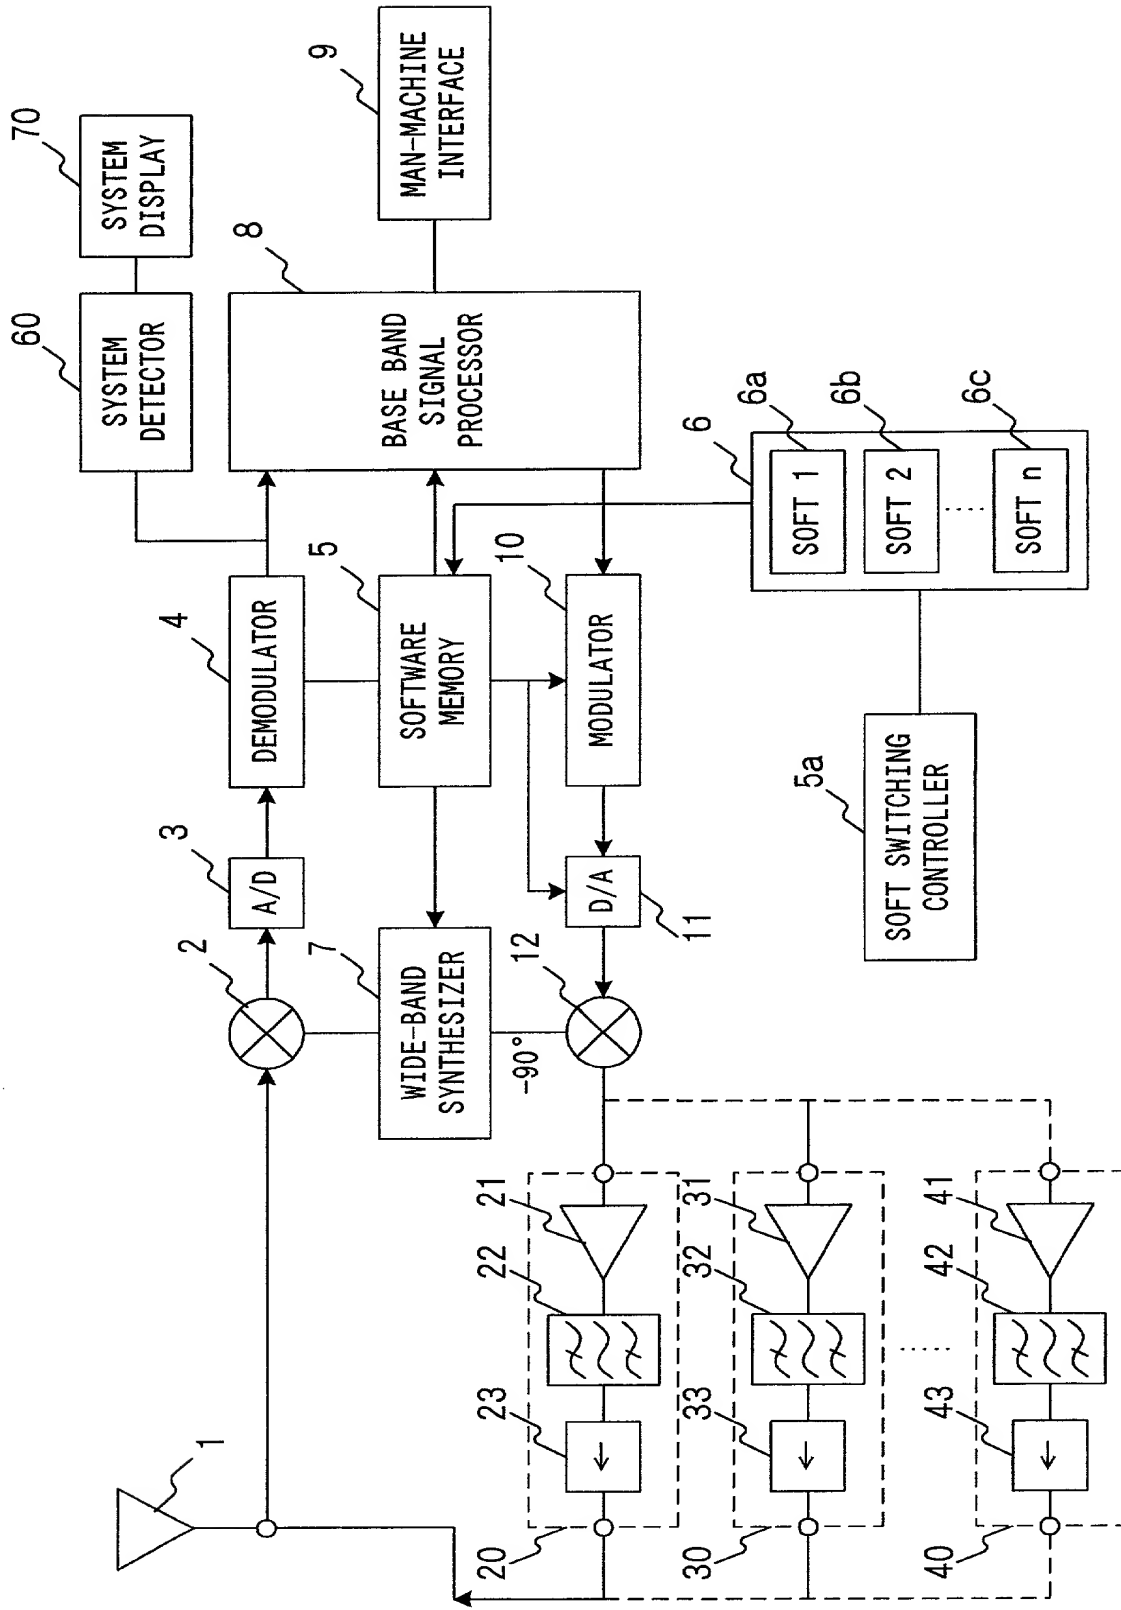


FIG.4

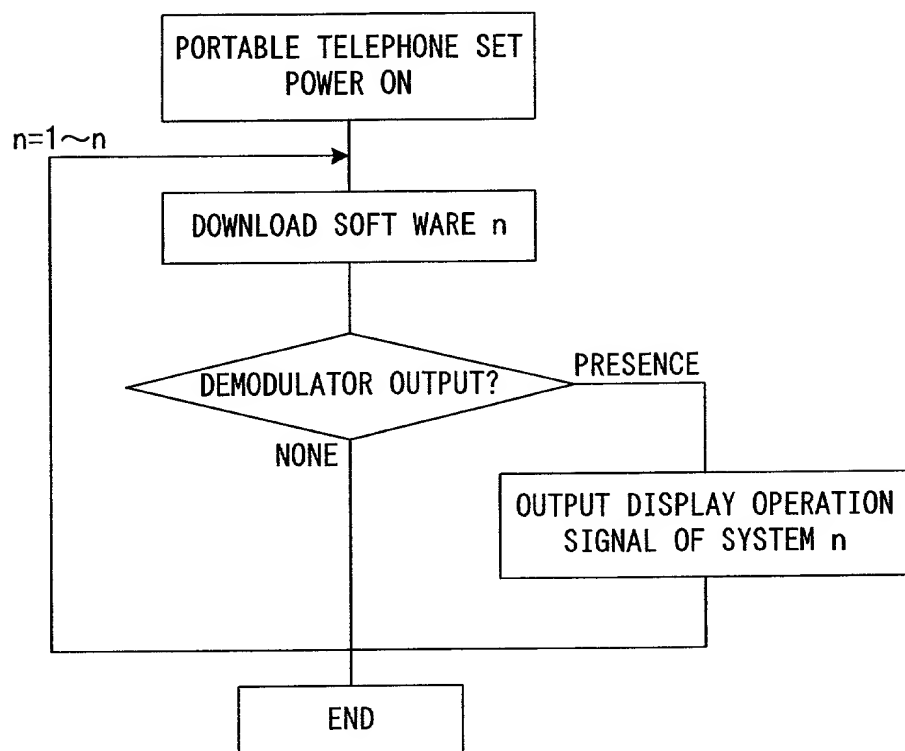

DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name;

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled: SOFTWARE PORTABLE TELEPHONE SET

the specification of which:

(check one) ☒ is attached hereto
☐ was filed on _____, as
Application Serial No. _____
and was amended on _____
(if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, § 1.56*

I hereby claim foreign priority benefits under Title 35, United States Code, § 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)			priority claimed	
<u>083162/1999</u>	<u>Japan</u>	<u>26/03/1999</u>	<u>X</u>	
(Number)	(Country)	(Day/Month/Year Filed)	yes	no
<u> </u>	<u> </u>	<u> </u>	yes	no
(Number)	(Country)	(Day/Month/Year Filed)		
<u> </u>	<u> </u>	<u> </u>	yes	no
(Number)	(Country)	(Day/Month/Year Filed)		

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, § 1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

(Application Serial No.)

(Filing Date)

(Status: patented, pending, abandoned)


Power of Attorney: As a named inventor, I hereby appoint Sean M. McGinn, Reg. 34,386, and Frederick W. Gibb, III, Reg. No. 37,629 as attorneys and/or agents to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. All correspondence should be directed to **McGinn & Gibb, P.C., 1701 Clarendon Boulevard, Suite 100, Arlington, Virginia 22209**. Telephone calls should be directed to McGinn & Gibb, P.C. at (703) 294-6699.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful

5-2367-1062

false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Sole
or First Inventor MASATAKA MITAMA

Inventor's Signature Masataka Mitama  Date 10/03/2000

Residence Tokyo, Japan

Citizenship Japanese

Post Office Address c/o NEC Corporation, 7-1, Shiba 5-chome, Minato-ku, Tokyo, Japan

Full Name of Second
Joint Inventor, If Any _____

Inventor's Signature _____ Date _____

Residence _____

Citizenship _____

Post Office Address _____

Full Name of Third
Joint Inventor, If Any _____

Inventor's Signature _____ Date _____

Residence _____

Citizenship _____

Post Office Address _____

Full Name of Fourth
Joint Inventor, If Any _____

Inventor's Signature _____ Date _____

Residence _____

Citizenship _____

Post Office Address _____

(An additional sheet(s) is/are attached hereto if the present invention includes more than four inventors.)

*Title 37, Code of Federal Regulations, § 1.56:

(a) A patent by its very nature is affected with a public interest. The public interest is best served, and the most effective patent examination occurs when, at the time an application is being examined, the Office is aware of and evaluates the teachings of all information material to patentability. Each individual associated with the filing and prosecution of a patent application has a duty of candor and good faith toward the Patent and Trademark Office, which includes a duty to disclose to the Office all information known to that individual to be material to patentability as defined in this section. The duty to disclose information exists with respect to each pending claim until the claim is canceled or withdrawn from consideration, or the application becomes abandoned.

(b) Under this section, information is material to patentability when it is not cumulative to information already of record or being made of record in the application, and (1) it establishes, by itself or in combination with other information, a prima facie case of unpatentability; or (2) it refutes, or is inconsistent with, a position the applicant takes in: (i) opposing an argument of unpatentability relied on by the Office, or (ii) asserting an argument of patentability.